


ES

ECOSLIDE

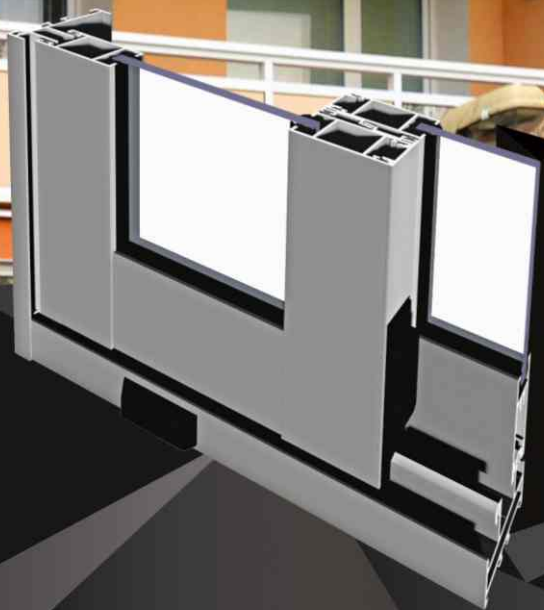

Aluminium sliding systems without thermal insulation. Suited for buildings public and residential buildings.

ES

A sliding door system without thermal insulation.

System intended for designing elements of architectural exterior and interior enclosures that do not require thermal insulation.


The system can have two, three or four rails to design 2-, 3-, 4- and 6-leaf installations. Possible infill thickness: 1-12 mm.

Movable leaf trolleys are fixed at the bottom of the leaves.


The ECOSLIDE system is compatible with other systems offered by Aliplast.

There is possibility of use Flyscreen system (Flyscreen – fly screens are a practical and an extremely functional protection against insects).

Wide range of colours – RAL palette (Qualicoat 1518), texture colours, Aliplast Wood Colour Effect (wood-like colours), Aliplast Loft View – colours imitating stone surfaces (Qualideco PL-0001), anodized colour (Qualanod 1808), bi-colour.

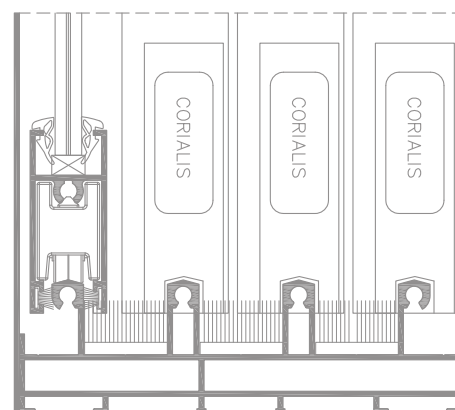

Ecoslide cross section

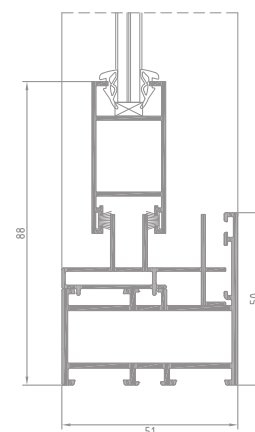

ECOSLIDE with adaptation profile in ECONOLINE casement

TECHNICAL SPECIFICATION

SYSTEM	MATERIAL	DEPTH OF FRAME	DEPTH OF LEAF	GLAZING RANGE	WEIGHT OF LEAF	TYPE OF DOORS
ES	aluminium / polyamid	54-106,5 mm / 18,5-21,5 mm / 4-12 mm			to 40 kg	sliding